

FEATURES AND SPECIFICATIONS

Features and Benefits

- Size 4 circuits
- Comes with capton tape for automated assembly
- Side flanges with screw holes and integral stability arm provide secure PCB retention and strain relief for SMT tails
- Solder tabs with metal locating pegs provide additional PCB retention
- Grounding fingers serve as locking feature and plug retention

Reference Information

Packaging: Embossed tape
Designed In: Millimeters

Electrical

Voltage: 30V
Current: 1.0A
Contact Resistance: 30mΩ max.
Dielectric Withstanding Voltage: 750V AC/1 min.
Insulation Resistance: 1000 MΩ min.

Physical


Housing: White glass-filled PPA, UL 94V-0
Shell: Brass, Tin/Lead over Nickel plating
Contact: Phosphor Bronze
Plating: Gold over Nickel in contact area;
Tin/Lead over Nickel in solder tail area
Operating Temperature: 0 to +40°C




Universal Serial Bus (USB) Shielded I/O Receptacle

54366

SMT, Side Flange Reverse Mount

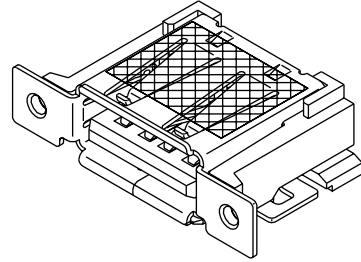

CATALOG DRAWING (FOR REFERENCE ONLY)

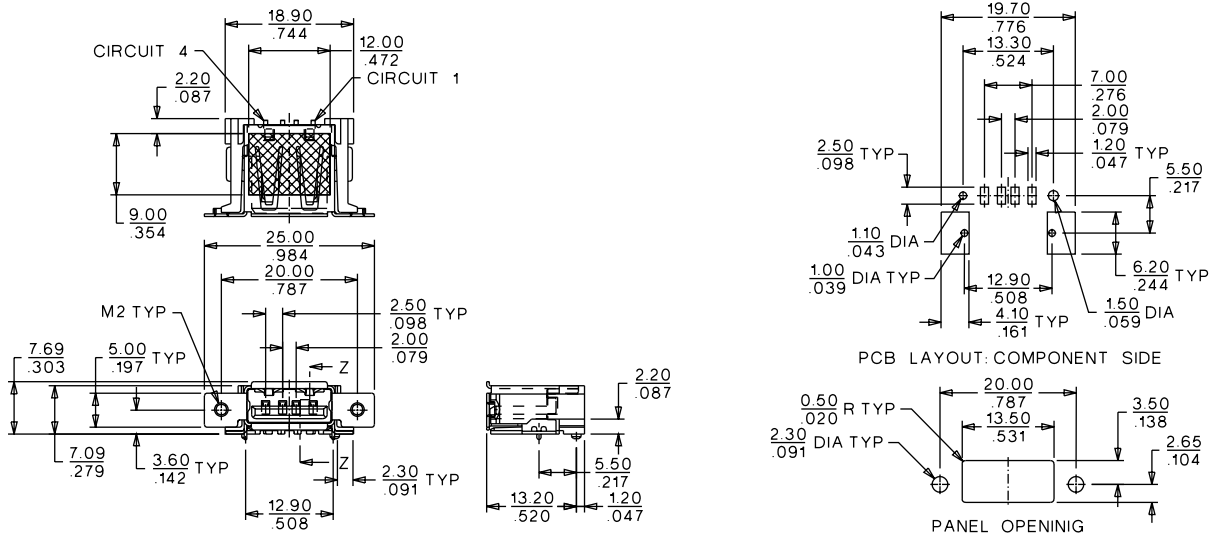

ORDERING INFORMATION

Circuits	Order No.
4	54366-0418