


# Rated Cross-Section 1.5 mm<sup>2</sup>



**PM 5.08/90**

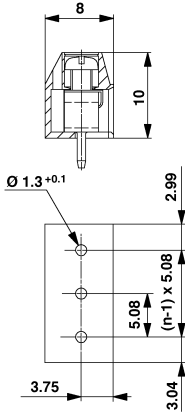

Technical data		VDE	UL	CSA
Rated voltage	V*	250	300	300
Rated current	A	17.5	10	10
Clamping range max.	mm <sup>2</sup> /AWG	1.5	14	14

\*Pollution severity 3 / Overvoltage category III



Additional technical data see page 58

Pin length **3.5 mm** **3.5 mm**



Colour		3.5 mm		3.5 mm	
Poles	Type	Cat.No.	Cat.No.	Qty.	Qty.
2	PM 5.08/2/90	<b>176049</b>	<b>176051</b>	500	
3	PM 5.08/3/90	<b>176050</b>	<b>176052</b>	500	

**MK8/135**



Technical data		VDE	UL	CSA
Rated voltage	V*	60	50	150
Rated current	A	16	15	10
Clamping range max.	mm <sup>2</sup> /AWG	1.5	14	14

\*Pollution severity 3 / Overvoltage category III



Additional technical data see page 59

Pin length **5.0 mm**



Colour		5.0 mm		
Poles	Type	Cat.No.	Cat.No.	Qty.
2	MK 8/2	<b>033206</b>		200
3	MK 8/3	<b>030786</b>		100
4	MK 8/4	<b>030776</b>		100
10	MK 8/10	<b>030266</b>		50

**MK7.5/135**



Technical data		VDE	UL	CSA
Rated voltage	V*	250	300	300
Rated current	A	16	10	10
Clamping range max.	mm <sup>2</sup> /AWG	1.5	16	16

\*Pollution severity 3 / Overvoltage category III

Additional technical data see page 59

Pin length **5.0 mm**



Colour		5.0 mm		
Poles	Type	Cat.No.	Cat.No.	Qty.
3	MK 7.5/3	<b>037926</b>		100

Accessories	Page
Marking	44
Fixing	-
Miscellaneous	47

Accessories	Page
Marking	44
Fixing	-
Miscellaneous	47



Accessories	Page
Marking	44
Fixing	-
Miscellaneous	47



# Rated Cross-Section 1.5 mm<sup>2</sup>



## LM 3.5/90



Technical data		VDE	UL	CSA
Rated voltage	V*	125	300	300
Rated current	A	12	10	10
Clamping range max.	mm <sup>2</sup> /AWG	1.5	14	14



\*Pollution severity 3 / Overvoltage category III  
Additional technical data see page 60

Pin length                      3.2 mm      4.5 mm



Colour				
Poles	Type	Cat.No.	Cat.No.	Qty.
2	LM 3.5/2/90	<b>166775</b>	<b>169967</b>	100
3	LM 3.5/3/90	<b>166777</b>	<b>169968</b>	100

## LM1N 3.5/90



Technical data		VDE	UL	CSA
Rated voltage	V*	125	300	300
Rated current	A	10	10	10
Clamping range max.	mm <sup>2</sup> /AWG	1.5	14	14

\*Pollution severity 3 / Overvoltage category III  
Additional technical data see page 60

Pin length                      3.2 mm      4.5 mm





Colour				
Poles	Type	Cat.No.	Cat.No.	Qty.
2	LM1N 3.5/2	<b>171671</b>	<b>174738</b>	100
3	LM1N 3.5/3	<b>171672</b>	<b>174739</b>	100

**Attention: Customers are advised to ensure support for LM1N on the PCB.**

Accessories	Page
Marking	44
Fixing	-
Miscellaneous	47

## LM 3.5/135



Technical data		VDE	UL	CSA
Rated voltage	V*	125	300	300
Rated current	A	12	10	10
Clamping range max.	mm <sup>2</sup> /AWG	1.5	14	14

\*Pollution severity 3 / Overvoltage category III  
Additional technical data see page 60

Pin length                      3.2 mm      4.5 mm



Colour				
Poles	Type	Cat.No.	Cat.No.	Qty.
2	LM 3.5/2/135	<b>171498</b>	<b>171501</b>	100
3	LM 3.5/3/135	<b>171502</b>	<b>171505</b>	100

Accessories	Page
Marking	-
Fixing	-
Miscellaneous	-

