



**Rated voltage 42 Vac/80 Vdc**  
**Rated current 100 to 300 mA**  
**Rated inductance 11 to 470  $\mu$ H**

### Construction

- Current-compensated ring core double choke with ferrite core
- Bifilar winding (B82799-C...)
- Sector winding (B82799-S...)

### Features

- High performance
- Case flame-retardant as per UL 94 V-0
- Suitable for reflow soldering and conductive adhesion
- Operation up to 150 °C (for  $L_R < 500 \mu$ H)

### Applications

- B82799-C:  
Suppression of asymmetrical interference coupled in on lines, whereas data signals up to some MHz can pass unaffectedly
- B82799-S:  
Suppression of asymmetrical (by  $L_R$ ) and symmetrical interference (by  $L_S$ ) coupled in on lines. The high-frequency portions of the symmetrical data signal are decreased so far that EMC problems can be significantly reduced

### Terminals

Gold plated


### Marking

Manufacturer, inductance value (coded),  
date code


### Delivery mode

Blister tape, reel packing.  
For details on taping, packing and packing units see data book 2000 "Chokes and Inductors", page 302.

Dimensional drawing

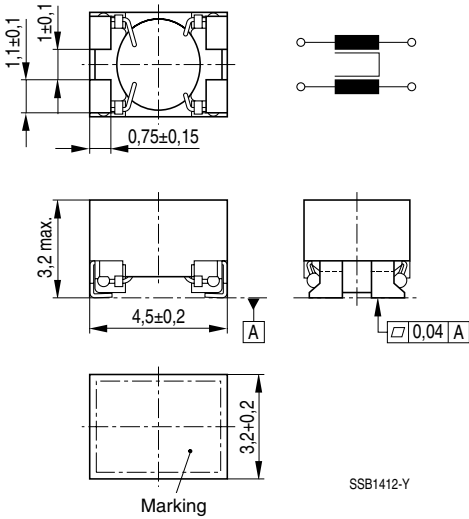

Layout recommendation




**General technical data**

Rated voltage $V_R$	42 Vac (50/60 Hz) 80 Vdc
Rated current $I_R$	referred to 50 Hz and 60 °C ambient temperature
Rated current $I_R$ for high temperature applications	min. 100 mA referred to 50 Hz and 150 °C ambient temperature
Rated inductance $L_R$	measured with HP 4275A at 100 kHz and 0,1 mA
Inductance tolerance	$\pm 30\%$ for $L_R \leq 51 \mu\text{H}$ $-30/+50\%$ for $L_R > 51 \mu\text{H}$
Inductance decrease $\Delta L/L_0$	$< 10\%$ at dc magnetic bias with $I_R$
Stray inductance $L_S$	measured with HP 4275A; measuring frequency at $L_R \leq 11 \mu\text{H} = 1 \text{ MHz}, 5 \text{ mA}$ $L_R > 11 \mu\text{H} = 100 \text{ kHz}, 5 \text{ mA}$
DC resistance $R_{\text{typ}}$	measured at 20 °C ambient temperature
Solderability	(235 $\pm$ 3) °C, (2 $\pm$ 0,3) s wetting of soldering area $\geq 95\%$ in accordance with IEC 60068-2-58
Climatic category	55/150/56 (-55 °C/+150 °C/56 days damp heat test) in accordance with EN 60068-1
Weight	Approx. 0,1 g


**Characteristics and ordering codes**

$L_R^{1)}$ $\mu\text{H}$	$L_S, \text{typ}$ $\mu\text{H}$	$I_R$ mA	$R_{\text{typ}}$ m $\Omega$	$V_T$ Vdc, 2 s	Ordering code
11	0,045	300	160	250	B82799C0113N001
22	1,30	250	220	250	B82799S0223N001
33	1,80	200	270	250	B82799S0333N001
51	2,70	200	310	250	B82799S0513N001
100	0,15	300	180	750	B82799C0104N001
220	0,20	200	250	750	B82799C0224N001
470	0,35	200	410	750	B82799C0474N001

1) Types up to 2200  $\mu\text{H}$  upon request.



Current derating  $I_{op}/I_R$   
versus ambient temperature  $T_A$

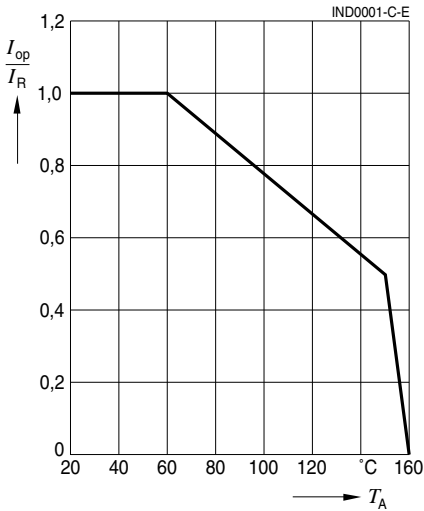


Rated temperature  $T_R = 60$  °C

Insertion loss  $\alpha_e$  (typical values at  $Z = 50$   $\Omega$ )


— asymmetrical, all branches in parallel (common mode)

- - - - - symmetrical (differential mode)

B82799C0113N001

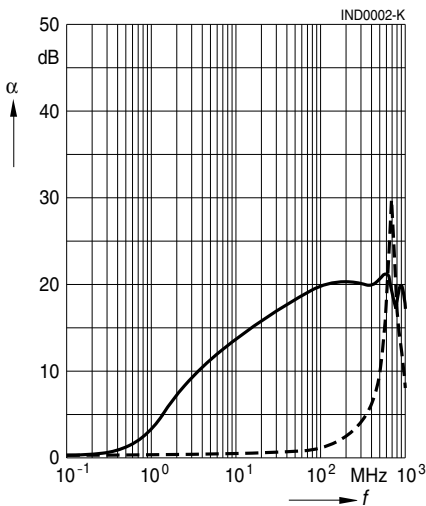

B82799S0223N001

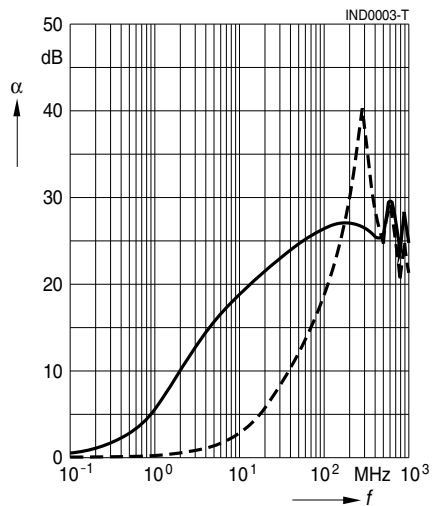


CAN Bus Choke, EIA 1812

Insertion loss  $\alpha_e$  (typical values at  $Z = 50 \Omega$ )


———— asymmetrical, all branches in parallel (common mode)

- - - - - symmetrical (differential mode)


B82799S0333N001

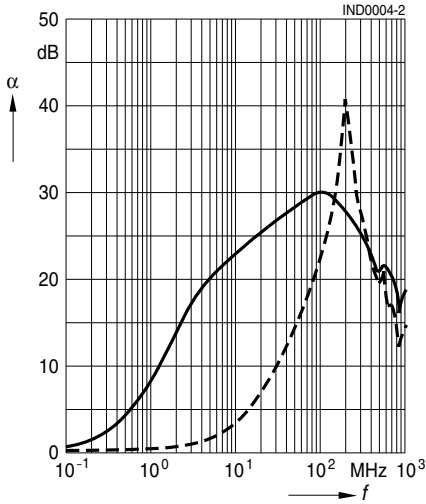


B82799S0513N001

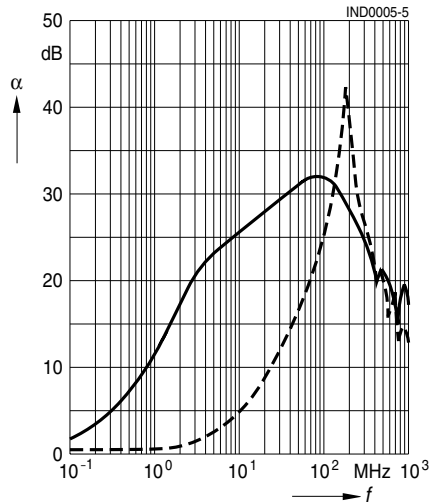

B82799C0104N001

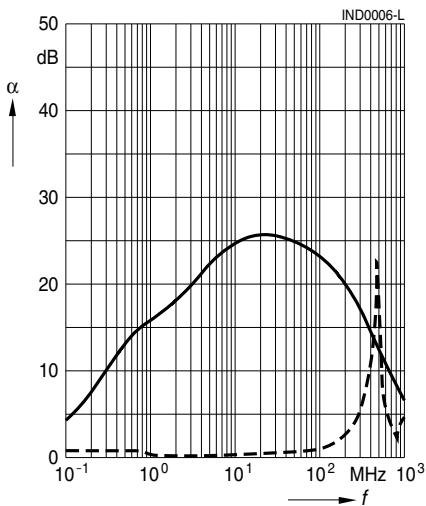

B82799C0224N001

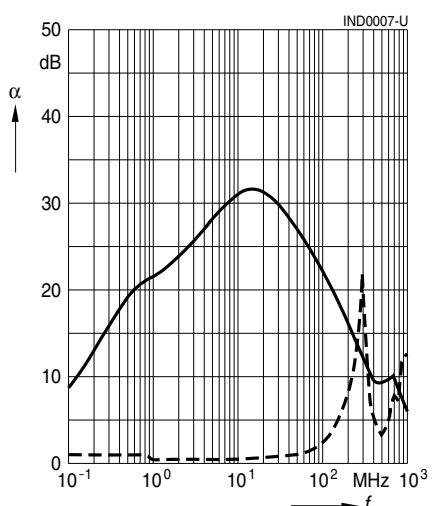


**Insertion loss  $\alpha_e$**  (typical values at  $Z = 50 \Omega$ )

———— asymmetrical, all branches in parallel (common mode)

- - - - - symmetrical (differential mode)

B82799C0474N001

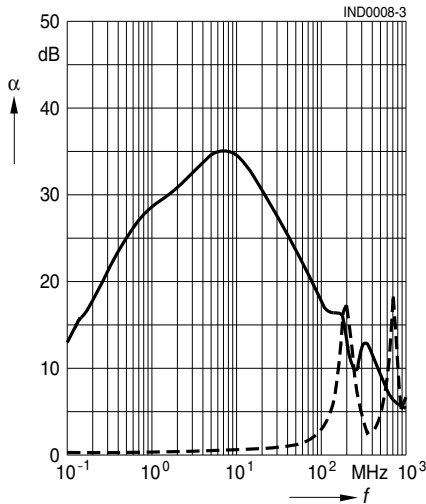

**Published by EPCOS AG**

**Corporate Communications, P.O. Box 80 17 09, 81617 Munich, GERMANY**

**☎ ++49 89 636 09, FAX (0 89) 636-2 26 89**

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.