




Toroidal Transformer Data Sheet

30-Dec-2009

Open Style, with leads, 230V Primary, 160VA

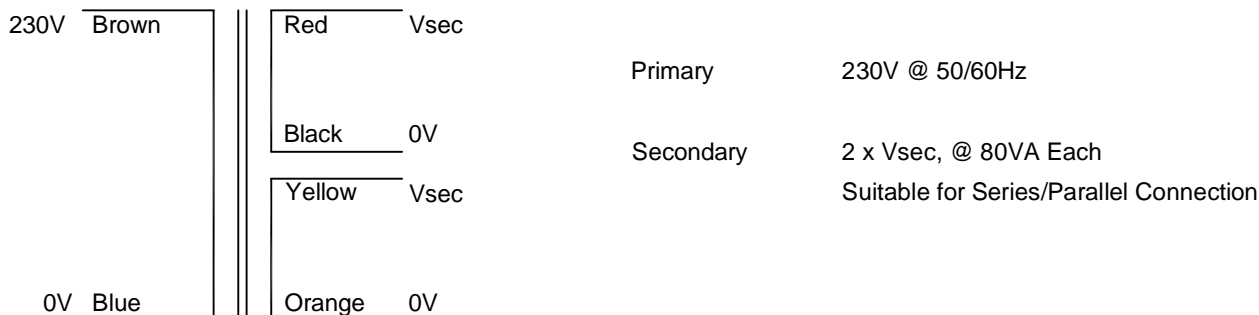

RS Code No.	RS Part No.	Full Load Vsec [V]	Rated Current per Sec [A]	No Load Vsec [V]	DC resistance [Ohms] @ 25° C
671-9019	81551-P1S2	2x12	6.667	2 x 12.99	2 x 0.0819
671-9012	81552-P1S2	2x15	5.333	2 x 16.39	2 x 0.1377
671-9016	81553-P1S2	2x18	4.444	2 x 19.58	2 x 0.1842
671-9025	81554-P1S2	2x25	3.200	2 x 27.18	2 x 0.3503
671-9028	81555-P1S2	2x30	2.667	2 x 32.57	2 x 0.5257
671-9022	81556-P1S2	2x55	1.455	2 x 59.70	2 x 1.7576

Primary Winding

Input Voltage : 230V±10 % @ 50/60Hz
 DC Resistance @25°C = 10 Ohms (approx)
 Magnetising Current @ 230V = 120.0mA (approx)
 Magnetising Current @ 253V = 300.0mA (approx)

Losses

Iron Losses 7.0 Watts (approx)
 Copper Losses 18.80 Watts (approx)

Temperature Class

Winding Wire (Primary & Secondary). Class H (180° C)
 Insulation between input and output. Class B (130° C)
 Connection lead insulation. Class A (105° C)

Standards

Designed,manufactured and tested according to the requirements of:
 EN61558 Class II, Non-Short-Circuit Proof
 VDE0570 Class II
 IEC61558 Class II
 UL506

Physical Data

Approximation Dimension Diameter 109mm*
 Height 46mm
 * Measured away from leadout bulge, allow extra 4mm at leads
 Approximate weight 1.74 Kg

Terminations

Primary Solid Copper Conductors (Extension of winding wire)
 double Insulated over their entire length with PVC tubing
 150mm Long, with 10mm tinned ends.

Secondary Solid copper conductors (extension of winding wire)
 insulated over their entire length with PVC tubing
 150mm Long, with 10mm tinned ends.